

COMPACT END STATION NW16o

THE SPACE SAVING SOLUTION




User-friendly Features

- ▶ Fully automatic computerized dispatch and receiving station
- ▶ Soft landing feature for smooth operation
- ▶ Advanced flexibility in planning and installation provided by space-saving dimensions
- ▶ Large, background-lighted display for multilingual, plain text information
- ▶ Well-engineered mechanism for highest reliability
- ▶ Proximity scanning of positions and carrier movement



Flexible wall mounting

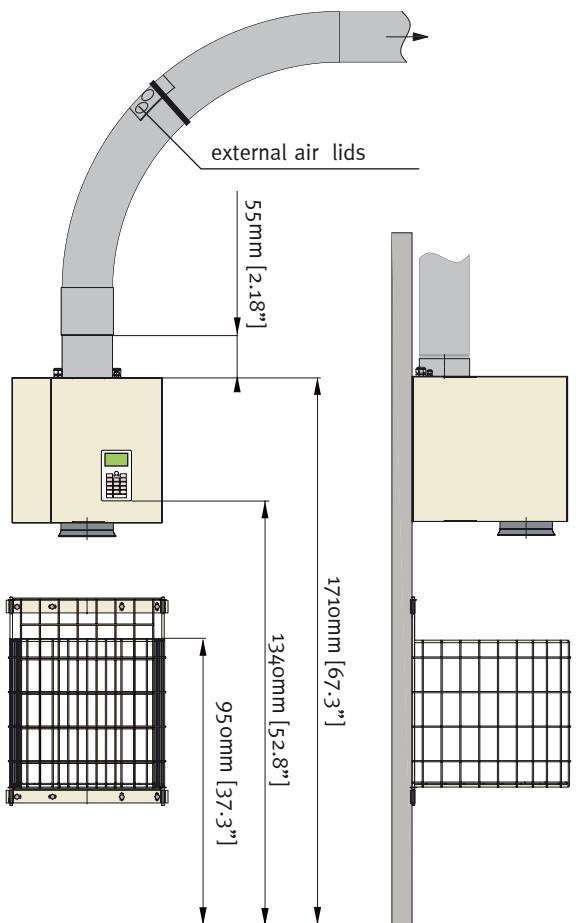

assembly dimensions

MECHANICAL FEATURES

- ▶ well-engineered mechanism for safe and reliable operation
- ▶ proximity scanning of positions and carrier movement
- ▶ self-adjusting, maintenance-free gaskets
- ▶ air-cushioned carrier soft landing
- ▶ air-tight

TECHNICAL DETAILS

Material:

powder-coated steel plate housing, colour: RAL1013

Available as:

end station

Tube diameter:

NW160mm

OPTIONAL FEATURES

- Arrival signal
- Carrier bin

The station is designed as a fully automatic dispatch and receiving unit and can be used as end station. The conveying direction of the carrier is set through an external blower station, which switches between compression or a vacuum.

For smooth operation arriving carriers are gently stopped by air cushion and automatically released into the basket below.


Station Compact with its small dimensions is the right choice in existing facilities and everywhere where space is limited. It allows flexible installation, individually adjustable mounting height and is easy to mount.

The operation is done menu-controlled by a membrane keyboard and a plain text display. Multilingual menu, status indication, individually programmable destination numbers and addresses, a search key and list of addresses ensure convenient handling.

Continuous monitoring and documentation of the system status and movement in the systems guarantee safe and reliable operation.

MAIN FEATURES IN SHORT

- ▶ fully automatic sending and receiving station with bottom load dispatch
- ▶ large, background-lighted display, multilingual menu
- ▶ destination forwarding
- ▶ multi-destination selection with arrival signal
- ▶ for each station system status indication

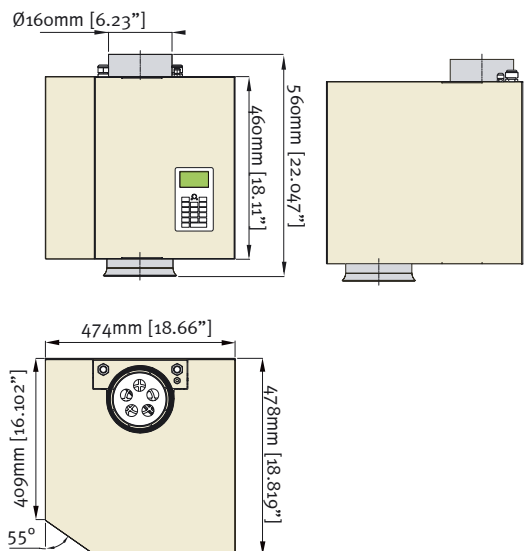

station's dimensions

Ing. Sumetzberger GMBH

A-1110 Vienna, Austria, Leberstr. 108, Tel.++43/1/740 35 0, Fax ++43/1/740 35 300

E-mail: pt.sales@sumetzberger.at, Internet: www.sumetzberger.at

... plus more than 46 dealerships worldwide.

